



## **C-Land Manufacturing, Inc.**

2401 SE 26th Street

Ocala, Florida 34471 USA

352/624-9667 or 352/624-9668 Fax

[Clandmanufacturing.com](http://Clandmanufacturing.com)

# TAPES

*C-Land Manufacturing, Inc.*

*2401 SE 26<sup>th</sup> Street  
Ocala, Florida 34471 USA  
352/624-9667  
352/624-9668 Fax  
Clandmanufacturing.com*

# *Duct Tape*



# C-Land

# CT1805

## CLOTH TAPE

### PRODUCT DESCRIPTION:

Mesh 50 Black / Grey / Black cloth backing, combined with a high performance synthetic rubber-resin adhesive,

### FEATURES:

- Cloth backing provides excellent reflection of both heat and light.
- High quality adhesive with super strong adhesion and holding power offers reliable a
- Low moisture vapor transmission rate makes C-Land Tape CT1805 an excellent vapor barrier.
- Service Temperature range from -20° to +80°C (-4° to +176°F).

### TYPICAL PHYSICAL PROPERTIES:

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Cloth Backing	Mesh	50	
Adhesive Thickness	80 Micron	3.2/ Mil	PSTC-33
Total Thickness	180 Micron	7.2/ Mil	PSTC-33
Peel Adhesion	12 N/25mm	45 Oz./In.	PSTC-1
Rolling Tack (11mm ball)	≤ 20 cm	≤ 8.0 In.	PSTC-6
Holding Power	2,000+ Min.	2,000+ Min.	PSTC-7
Service Temperature Ranger	-20 ~ +80 °C	-4 ~ +176 °F	-----

### PRODUCT FORM & SIZE AVAILABLE:

Cut Roll: 25/ 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1060mm x 50m

Jumbo Roll: 1060mm x 1000m

**STORAGE & SHELF LIFE:** One year when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

CT1805-2-180 2"x180'

CT1805-2-240 2"x240'

# C-Land

# CT2107 CLOTH DUCT TAPE

## PRODUCT DESCRIPTION:

Mesh 70 Black / Grey / Black cloth backing, combined with a high performance synthetic rubber-resin adhesive,

## FEATURES:

- Cloth backing provides excellent reflection of both heat and light.
- High quality adhesive with super strong adhesion and holding power offers reliable a
- Low moisture vapor transmission rate makes C-Land Tape CT2107 an excellent vapor barrier.
- Service Temperature range from -20° to +80°C (-4° to +176°F).

## TYPICAL PHYSICAL PROPERTIES:

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Cloth Backing	Mesh	70	
Adhesive Thickness	80 Micron	3.2/ Mil	PSTC-33
Total Thickness	210 Micron	8.4/ Mil	PSTC-33
Peel Adhesion	14 N/25mm	50 Oz./In.	PSTC-1
Rolling Tack (11mm ball)	≤ 20 cm	≤ 8.0 In.	PSTC-6
Holding Power	2,000+ Min.	2,000+ Min.	PSTC-7
Service Temperature Ranger	-20 ~ +80 °C	-4 ~ +176 °F	-----

## PRODUCT FORM & SIZE AVAILABLE:

Cut Roll: 25/ 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1060mm x 50m Jumbo Roll: 1060mm x 1000m

**STORAGE & SHELF LIFE:** One year when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the product.

CT2107-2-180 2"x180'

CT2107-2-240 2"x240'

*C-Land Manufacturing, Inc.*

*2401 SE 26<sup>th</sup> Street  
Ocala, Florida 34471 USA  
352/624-9667  
352/624-9668 Fax  
Clandmanufacturing.com*

# *Aluminum Foil Tape*



# C-Land

## High Quality

# AF5025

## Aluminum Foil Tape

### PRODUCT DESCRIPTION

A 50 micron (2.0 mil) high tensile strength aluminum foil backing, combined with a high performance solvent acrylic adhesive, protected by an easy-release silicone release paper.

### FEATURES

- Aluminum backing provides excellent reflection of both heat and light.
- High quality adhesive with strong adhesion and holding power offers permanent sealing and bonding on Foil-Scrim-Kraft Facing joints and seams in HVAC ductwork application.
- Good aging resistance both indoors and outdoors.
- Low moisture vapor transmission rate offers excellent sealing and patching performance

### TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	50 Micron	2.0 Mil	PSTC-133 / ASTM D 3652
Total Thickness	90 Micron	3.6 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	20 N/25mm	72 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	15 cm	6.0 In.	PSTC-6 / ASTM D 3121
Tensile Strength	75 N/25mm	17.0 Lb/In	PSTC-131 / ASTM D 3759
Elongation %	3.5	3.5	PSTC-131 / ASTM D 3759
Service Temperature	-30 ~ +120 °C	-22 ~ +248 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

**TYPICAL APPLICATIONS:** HVAC industry for joining and sealing Foil-Scrim-Kraft Facing laminated fiberglass blanket / duct board joints and seams; joining and sealing flexible air duct seams and connections. General purpose holding, patching, sealing and masking applications – indoors and outdoors.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1200mm x 45 / 50m Jumbo Roll: 1200mm x 1000m / 1200m

**STORAGE & SHELF LIFE:** 12 months when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

AF5025-2-150 2"X150'

AF5025-3-150 3"X150'

# C-Land

## High Quality

# AF4025

## Aluminum Foil Tape

---

### PRODUCT DESCRIPTION

A 40 micron (1.6 mil) high tensile strength aluminum foil backing, combined with a high performance solvent acrylic adhesive, protected by an easy-release silicone release paper.

### FEATURES

- Aluminum backing provides excellent reflection of both heat and light.
- High quality adhesive with strong adhesion and holding power offers permanent sealing and bonding on Foil-Scrim-Kraft Facing joints and seams in HVAC ductwork application.
- Good aging resistance both indoors and outdoors.
- Low moisture vapor transmission rate offers excellent sealing and patching performance.

### TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	40 Micron	1.6 Mil	PSTC-133 / ASTM D 3652
Total Thickness	80 Micron	3.2 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	20 N/25mm	72 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	15 cm	6.0 In.	PSTC-6 / ASTM D 3121
Tensile Strength	55 N/25mm	12.5 Lb/In	PSTC-131 / ASTM D 3759
Elongation	%.	3.0	PSTC-131 / ASTM D 3759
Service Temperature	-30 ~ +120 °C	-22 ~ +248 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

**TYPICAL APPLICATIONS:** HVAC industry for joining and sealing Foil-Scrim-Kraft Facing laminated fiberglass blanket / duct board joints and seams; joining and sealing flexible air duct seams and connections. General purpose holding, patching, sealing and masking applications – indoors and outdoors.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1200mm x 45 / 50m Jumbo Roll: 1200mm x 1200m / 1350m

**STORAGE & SHELF LIFE:** 12 months when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

---

**AF4025-2-150 2"X150'**

**AF4025-3-150 3"X150'**

# C-Land

## High Quality

# AF3625

## Aluminum Foil Tape

### PRODUCT DESCRIPTION

A 36 micron (1.44 mil) high tensile strength aluminum foil backing, combined with a high performance solvent acrylic adhesive, protected by an easy-release silicone release paper.

### FEATURES

- Aluminum backing provides excellent reflection of both heat and light.
- High quality adhesive with strong adhesion and holding power offers permanent sealing and bonding on Foil-Scrim-Kraft Facing joints and seams in HVAC ductwork application.
- Good aging resistance both indoors and outdoors.
- Low moisture vapor transmission rate offers excellent sealing and patching performance.

### TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	36 Micron	1.44 Mil	PSTC-133 / ASTM D 3652
Total Thickness	76 Micron	3.0 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	20 N/25mm	72 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	15 cm	6.0 In.	PSTC-6 / ASTM D 3121
Tensile Strength	50 N/25mm	11.4 Lb/In	PSTC-131 / ASTM D 3759
Elongation	%.	3.0	PSTC-131 / ASTM D 3759
Service Temperature	-30 ~ +120 °C	-22 ~ +248 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

**TYPICAL APPLICATIONS:** HVAC industry for joining and sealing Foil-Scrim-Kraft Facing laminated fiberglass blanket / duct board joints and seams; joining and sealing flexible air duct seams and connections. General purpose holding, patching, sealing and masking applications – indoors and outdoors.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1200mm x 45 / 50m Jumbo Roll: 1200mm x 1200m / 1350m

**STORAGE & SHELF LIFE:** 12 months when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

AF3625-2-150 2"X150'

AF3625-3-150 3"X150'

# C-Land

## High Quality

# AF3605

## Aluminum Foil Tape

### PRODUCT DESCRIPTION

A 36 micron (1.44 mil) dead soft aluminum foil backing, combined with a high performance synthetic rubber-resin adhesive, protected by an easy-release silicone release paper.

### FEATURES

- Aluminum backing provides excellent reflection of both heat and light.
- High quality adhesive with super strong adhesion and holding power offers reliable and durable Foil-Scrim-Kraft Facing joints and seams sealing in HVAC ductwork application.
- Low moisture vapor transmission rate makes C-Land AF3605 an excellent vapor barrier.
- Service Temperature range from -20° to +80°C (-4° to +176°F).

### TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	36 Micron	1.44 Mil	PSTC-133 / ASTM D 3652
Total Thickness	76 Micron	3.04 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	25 N/25mm	90 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	20 cm	8.0 In.	PSTC-6 / ASTM D 3121
Tensile Strength	45 N/25mm	10.2 Lb/In	PSTC-131 / ASTM D 3759
Elongation	%.	3.0	PSTC-131 / ASTM D 3759
Service Temperature	-20 ~ +80 °C	-4 ~ +176 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

**TYPICAL APPLICATIONS:** HVAC industry for joining and sealing Foil-Scrim-Kraft Facing laminated fiberglass blanket / duct board joints and seams; joining and sealing flexible air duct seams and connections. May also be used for other industrial uses requiring a tape with these characteristics and benefits.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1200mm x 45 / 50m Jumbo Roll: 1200mm x 1200m

**STORAGE & SHELF LIFE:** One year when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

AF3605-2-150 2"X150'


AF3605-3-150 3"X150'

## *C-Land Manufacturing, Inc.*

2401 SE 26<sup>th</sup> Street  
Ocala, Florida 34471 USA  
352/624-9667  
352/624-9668 Fax  
[Clandmanufacturing.com](http://Clandmanufacturing.com)

---

# *Foil-Kraft Tape*

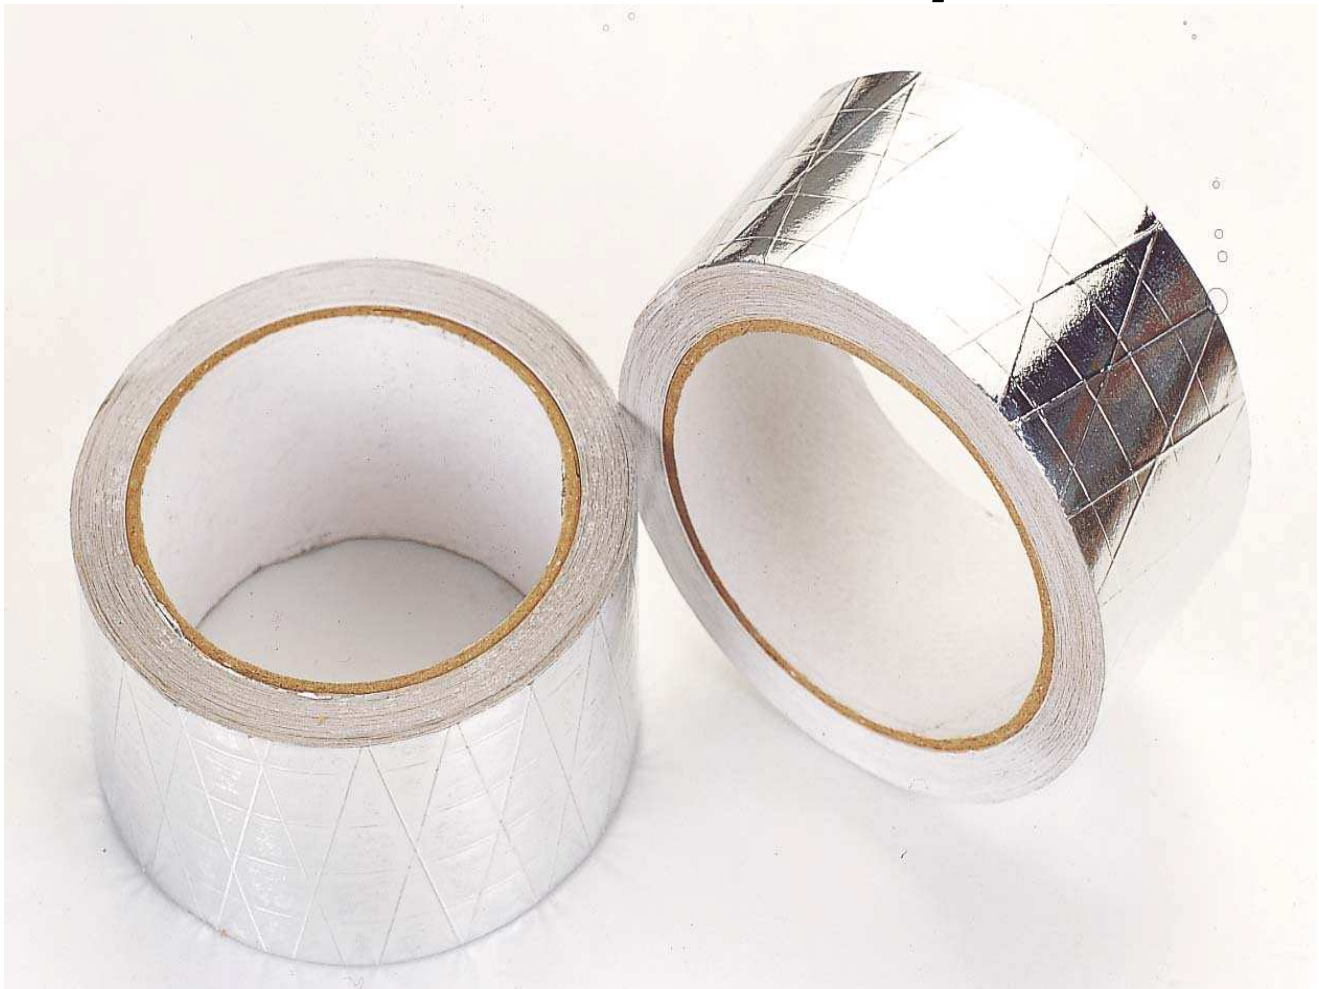

# C-Land

## High Quality

# AF7125A

## Foil-Scrim-Kraft Tape

### PRODUCT DESCRIPTION

3-way Foil-Scrim-Kraft backing, combined with a transparent high performance solvent acrylic adhesive, protected by an easy-release silicone release paper.

### FEATURES

- 3-way Foil-Scrim-Kraft backing provides excellent reflection of both heat and light.
- High quality adhesive with super strong adhesion and holding power offers reliable and durable Foil-Scrim-Kraft Facing joints and seams sealing in HVAC ductwork application.
- Low moisture vapor transmission rate makes C-Land Tape AF7125A an excellent vapor barrier.
- Service Temperature range from -30 ~ +80 °C (-22~ +176 °F).

### TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	120 Micron	4.8 Mil	PSTC-133 / ASTM D 3652
Total Thickness	170 Micron	6.8 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	25 N/25mm	90 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	15 cm	6.0 In.	PSTC-6 / ASTM D 3121
Tensile Strength	120 N/25mm	27.3 Lb/In	PSTC-131 / ASTM D 3759
Elongation	%.	1.0	PSTC-131 / ASTM D 3759
Service Temperature	-30 ~ +80 °C	-22 ~ +176 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

**TYPICAL APPLICATIONS:** HVAC industry for joining and sealing Foil-Scrim-Kraft Facing laminated fiberglass blanket / duct board joints and seams; joining and sealing flexible air duct seams and connections. May also be used for other industrial uses requiring a tape with these characteristics and benefits.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1200mm x 45 / 50m Jumbo Roll: 1200mm x 730m / 800m

**STORAGE & SHELF LIFE:** 12 months when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

AF7125A-2-150 2"X150'

AF7125A-3-150 3"X150'

# C-Land

## High Quality

# AF7105A

## Foil-Scrim-Kraft Tape

### PRODUCT DESCRIPTION

3-way Foil-Scrim-Kraft backing, combined with a transparent high performance synthetic rubber-resin adhesive, protected by an easy-release silicone release paper.

### FEATURES

- 3-way Foil-Scrim-Kraft backing provides excellent reflection of both heat and light.
- High quality adhesive with super strong adhesion and holding power offers reliable and durable Foil-Scrim-Kraft Facing joints and seams sealing in HVAC ductwork application.
- Low moisture vapor transmission rate makes C-Land Tape AF7105A an excellent vapor barrier.
- Service Temperature range from -20 ~ +80 °C (-4 ~ +176 °F).

### TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	120 Micron	4.8 Mil	PSTC-133 / ASTM D 3652
Total Thickness	170 Micron	6.8 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	25 N/25mm	90 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	20 cm	8.0 In.	PSTC-6 / ASTM D 3121
Tensile Strength	120 N/25mm	27.3 Lb/In	PSTC-131 / ASTM D 3759
Elongation	%.	1.0	PSTC-131 / ASTM D 3759
Service Temperature	-20 ~ +80 °C	-4 ~ +176 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

**TYPICAL APPLICATIONS:** HVAC industry for joining and sealing Foil-Scrim-Kraft Facing laminated fiberglass blanket / duct board joints and seams; joining and sealing flexible air duct seams and connections. May also be used for other industrial uses requiring a tape with these characteristics and benefits.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").

Log Roll: 1200mm x 45 / 50m Jumbo Roll: 1200mm x 730m / 800m

**STORAGE & SHELF LIFE:** 12 months when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

AF7105A-2-150 2"X150'

AF7105A-3-150 3"X150'

# C-Land WPSK4525A

## High Quality White PP-Scrim-Kraft Tape

### PRODUCT DESCRIPTION

3-way White Polypropylene-Scrim-Kraft backing, combined with a high performance solvent acrylic adhesive, protected by an easy-release silicone release paper.

### FEATURES

- Match White PP-Scrim-Kraft Facing
- Good Sticking on Polypropylene
- High Performance Adhesive
- Excellent Vapor Barrier & Low WVTR

### TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	120 Micron	4.8 Mil	PSTC-133 / ASTM D 3652
Total Thickness	170 Micron	6.8 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	20 N/25mm	72 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	15 cm	6.0 In.	PSTC-6 / ASTM D 3121
Tensile Strength	185 N/25mm	42 Lb/In	PSTC-131 / ASTM D 3759
Elongation	%.	1.0	PSTC-131 / ASTM D 3759
Service Temperature	-30 ~ +80 °C	-22 ~ +176 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

### TYPICAL APPLICATIONS

HVAC industry for joining and sealing White Polypropylene-Scrim-Kraft Facing laminated fiberglass blanket / duct board joints and seams; and repairing damaged PP-Scrim-Kraft Facing in metal building insulation.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3") / 96mm / 100mm (4").  
 Log Roll: 1200mm x 45 / 50m Jumbo Roll: 1200mm x 730m / 800m

STORAGE & SHELF LIFE: 12 months when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

SURFACE PREPARATION: It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

PRODUCT USE: It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

LIMITED WARRANTY & LIMITED REMEDY: Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

WPSK4525A-2-150 2"X150'

WPSK4525A-3-150 3"X150'

---

## *C-Land Manufacturing, Inc.*

*2401 SE 26<sup>th</sup> Street  
Ocala, Florida 34471 USA  
352/624-9667  
352/624-9668 Fax  
Clandmanufacturing.com*

# *Metalized Tape*



# C-Land

# MPP3815

High Quality

Flexible Duct Closure Tape

## PRODUCT DESCRIPTION

A premium grade Flexible Duct Closure Tape, 38u (1.5 mil) metallized polypropylene film with thickened cold weather water-based acrylic adhesive system.

## FEATURES

- ◆ Good Tack
- ◆ Flexible & Durable
- ◆ Perform Well in Both Warm & Cold Weather
- ◆ Conform Well to Irregular Surface

## TYPICAL PHYSICAL PROPERTIES

PROPERTIES	METRIC	ENGLISH	TEST METHOD
Backing Thickness	38 Micron	1.5 Mil	PSTC-133 / ASTM D 3652
Total Thickness	75 Micron	3.0 Mil	PSTC-133 / ASTM D 3652
Adhesion to Steel	11 N/25mm	39.6 Oz./In.	PSTC-101 / ASTM D 3330
Tack Rolling Ball	8.0 cm	3.2 In.	PSTC-6 / ASTM D 3121
Tensile Strength	95 N/25mm	21.6 Lb/In	PSTC-131 / ASTM D 3759
Elongation	%.	100	PSTC-131 / ASTM D 3759
Service Temperature	-30 ~ +100 °C	-22 ~ +212 °F	-----
Applying Temperature	+10 ~ 40 °C	+50 ~ +105 °F	-----

## TYPICAL APPLICATIONS

Primarily used for connect, join, seal and patch flexible air ducts and air connectors, can also be used in metal and metal connections.

### PRODUCT FORM & SIZE AVAILABLE

Cut Roll: 48 / 50mm (2") / 60 / 63mm (2.5") / 72 / 75mm (3").

Log Roll: 1020mm x 50 / 55 / 110m

Jumbo Roll: 1020 / 1280mm x 3000m

STORAGE & SHELF LIFE: 12 months when stored at 21 °C (70 °F) / 50% relative humidity out of direct sunlight.

**SURFACE PREPARATION:** It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease, oil or other contaminants.

**PRODUCT USE:** It is essential that the user evaluate the C-Land Tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on C-Land Tape product between +10 ~ +40°C (+50 ~ +105 °F).

**LIMITED WARRANTY & LIMITED REMEDY:** Your exclusive remedy & C-Land Tape obligation shall be, at C-Land's option, to replace or repair the C-Land Tape product or refund the purchase price of the C-Land Tape product.

MPP3815-2-150 2"X150'

MPP3815-3-150 3"X150'